

# 5151 Plug-In Heat Detector



5151

## Models Available

5151  
Plug-In Heat Detector

## Description

*5151 Plug-in HEAT Detectors offer superb performance and Reliability in a sleek, low-profile design.*

The 5151 thermal detector meets the needs for Applications where rapid response is vital and rapid temperature increases would only be caused by a fire Emergency. The detector initiates an alarm in response to both rapid Rate-of-rise conditions (increases in excess of 15 °F per minute) and fixed heat (135 °F). This enables the heat Detector to communicate an alarm to the central control panel prior to reaching its fixed set point for high rates of Rise, providing a timely response to both rapid and slow temperature increases.

A full line of accessories are available for this product.

## Features

- Low standby current
- Compatible with 400 Series product
- Two visible LEDs “blink” in standby and provide a 360 ° field viewing angle
- Detector head plugs easily into base
- Built-in test switch
- Wide variety of mounting bases with built-in shorting spring



## Agency Listing



# Specifications

Height:	50 mm installed in B401 Base
Diameter:	102 mm installed in B401 Base
Weight:	2.8 oz. ( 80 g )
Operating Temperature Range:	0 °C to 38 °C (32 °F to 100 °F)
Operating Humidity Range:	10% to 93% Relative Humidity, non-condensing
Operating Voltage:	8.5 to 35VDC
Standby Current:	80µA @ 24VDC
Alarm Current:	10mA Min. 130mA Max. (Must be limited by control panel)
Latching Alarm:	Reset by momentary power interruption.
Sensitivity:	57 °C (135 °F) Fixed or 15 °F /min rate-of-rise

# Appearance

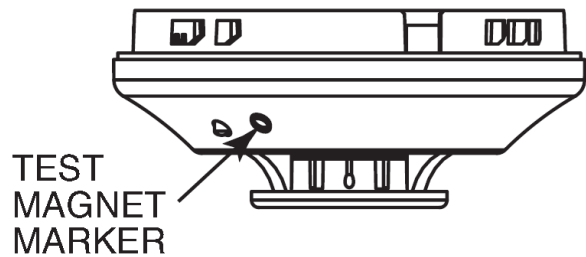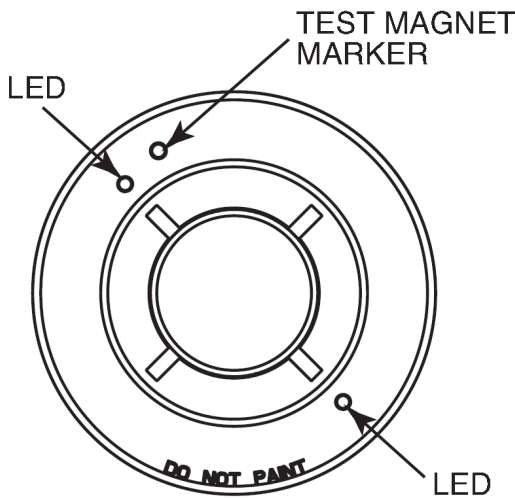

# Ordering Information

Ordering Model	Description	UL	FM	UOM
5151	Plug-In Heat Detector	Yes	Yes	EA
B401	Plug-In Detector Base, 4"	Yes	Yes	EA
B401B	Plug-In Detector Base, 6.2"	Yes	NA	EA
B401-WP	Water proof Plug-In Detector Base, 4"	NA	NA	EA



System Sensor Headquarters  
3825 Ohio Avenue  
St. Charles, IL 60174  
Ph: 630-377-6580  
Fx: 630-377-6495  
Free Phone: 800-736-7672  
Web: www.systemsensor.com

System Sensor China  
28 Tuan Jie South Road,  
Hi-Tech Development Zone  
Xi'an, 710075, China  
Ph: +86 29 85387800  
Fx: +86 29 88895930  
Web: www.systemsensor.com.cn

System Sensor Canada  
Ph: 905-812-0767  
Fx: 905-812-0771

System Sensor Europe  
Ph: 44 (0) 1527 406700  
Fx: 44 (0) 1527 406699

System Sensor Italy  
Ph: 39 040 949 0111  
Fx: 39 040 382 137

System Sensor Mexico  
Ph: 54 11 4324-1909  
Fx: 54 11 4324-5999

System Sensor Far East Ltd  
Ph: 852 21919003  
Fx: 852 27366580

System Sensor Singapore  
Ph: 65 6273 2230

System Sensor India  
Ph: 91 124 2371770-270  
Fx: 91 124 2373118

System Sensor Australia  
Ph: 61-3-5428 1142  
Fx: 61-3-5428 1172